


X-QUISITE VORO

Finest MC cartridge with patented ceramic transducer with double-layer iron core, pure copper coil and skeletonized ceramic body design.

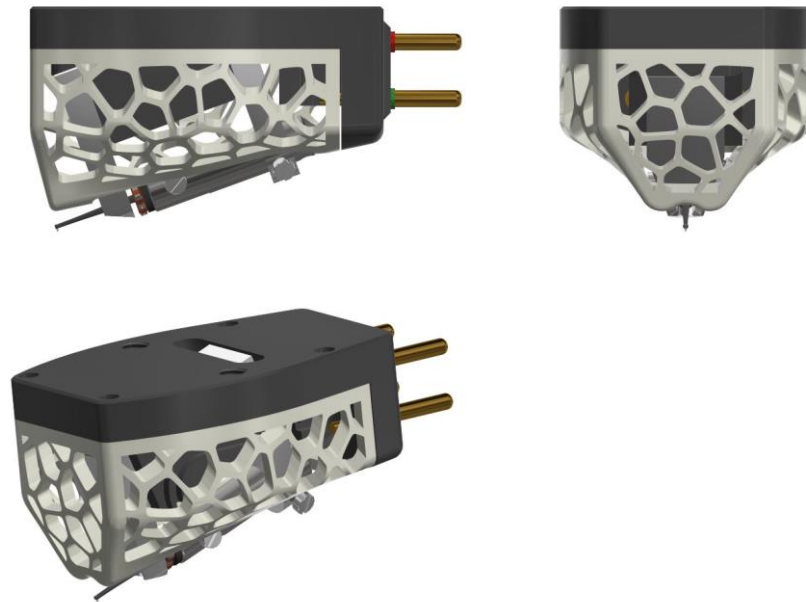

Specification	
Cantilever and coil body:	Ceramic/Armco unit, patented design
Coil:	Pure Copper 4N
Diamond shape:	FGS
Magnet unit:	Neodym-Armco
Body:	Ceramic-aluminium
Connection:	1/2" – 4pin, gold plated
Vertical Tracking Angle:	20°
Weight:	10,2g
Tracking force:	1,9...2,1g
Output voltage:	0,7mV @ 5cm/s
Compliance:	12µm/mN
Frequency response:	20-30'000Hz
±2dB:	40-15'000Hz
FIM distortion	max. 0.2%
Impedance:	2 x 10 Ohms
Recommended load:	100...200 Ohms